



Design and implement of irrigation prototype system based GSM

Muhammad F. Obead¹, Ihsan A.Taha² and Ahmed H. Salman³

^{1,2,3}Department of computer technical engineering, Al-Esra'a University College, Iraq Baghdad

¹E-Mail: muhammad.fahim@esraa.edu.iq, ²E-Mail: Ihsan@esraa.edu.iq, ³E-mail:Ahmed@esraa.edu.iq

ABSTRACT: Smart farming is one of the keys for future agriculture because it is a management to use modern technology for increasing the quality and quantity of the agriculture. And because of the planet quality depend on the amount of water and the characteristics of soil, it is necessary to study the soil using the soil moisture sensor to investigate whether the soil is dry or wet, also to consider the challenges that could be faced in agricultural environment by maintain the soil and the planets irrigated without extra usage of water. In this thesis, a prototype irrigation system uses Arduino Uno microcontroller which is programmed in C++ language to sense the degree of moisture by using soil moisture sensor. According to moisture sensor readings, when the moisture sensor above 1000, Arduino triggers to supply the water by using 5V mini water pump and stop when the soil moisture sensor reading reaches below 400. GSM technology enables the user to be notified in any changes happening in agricultural area by sending SMS (Short Message Service). Whenever the soil become wet or dry and the mini water pump switched on or off, A message delivered to user's cellular phone indicating the condition of the soil and the action of water pump. In that capacity, this prototype will reduce the time for the user by monitoring remotely without going to his land, and also to reduce the usage of water by allow the water pump to flow the water for limited time until the moisture degree raise again.

Keywords: Smart farming, Agriculture, Arduino, moisture sensor, GSM

1. INTRODUCTION

The agriculture represents the major fortune and the backbone for some countries due to their rule of increasing the income of economic activity. The continuous growing of the population of a nation requires more innovation in food production technology. As there are many factors directly effecting on the agricultural progresses, these factors must be study carefully to get the best results[1]. Irrigation is the efficient system that could simulate ample effects on agriculture like dryness that may classify as the main problem that can directly effect on the seeding plant and it is a result of global warming. Increasing in temperature causes the soil to be too dry and not suitable for agriculture, and it will be malnutrition since the activity of microbial supplies the nutrients to the planet. Some of people irrigate their farms, gardens and small home plants every day

regularly, but some of them find it challenge to maintain their plant watered due to busy schedule during the day hours [2]. For the reasons above, the objective of studying an automatic irrigation is to sense the humidity of the soil so that can irrigate the exact amount of water to the plants. In this project, the system will be used to remotely monitor the irrigation system for watering using the combination of Microcontroller Arduino, GSM and moisture sensor. The moisture sensor will sense the soil to check its condition through a programmable reading referring to sensor specification, Then the microcontroller will receive the reading of the sensor and translate it based on the value condition. The GSM will send a short message to the user's cell phone[3].

¹E-Mail: muhammad.fahim@esraa.edu.iq

²E-Mail: Ihsan@esraa.edu.iq

³E-mail:Ahmed@esraa.edu.iq

2. METHODOLOGY

The project constructed as a prototype that will detect the moisture level in the soil by using moisture sensor. It will implement the monitoring by using short message service (SMS) through the cellular phone. The system overview is as following[4]:

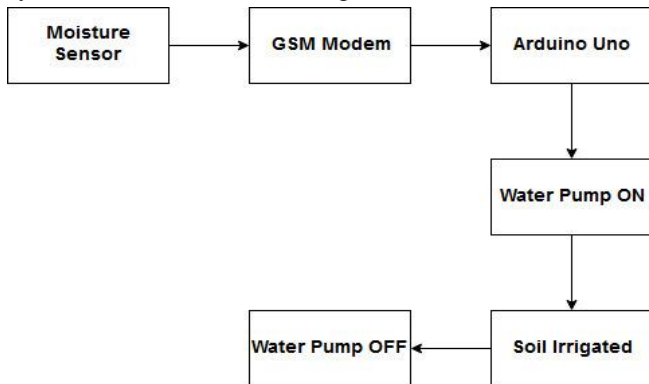


Figure 1. Watering system block diagram.

3. SYSTEM COMPONENTS

A. ARDUINO UNO

Arduino Uno is an open source electronic device can be programmed to perform several tasks. It can read input devices and send information to the output devices [5]. Arduino Uno constructed from to basic parts, physical part which is programmable circuit (microcontroller) and software part is IDE (Integrated development environment) that operate the program code on computer[6].

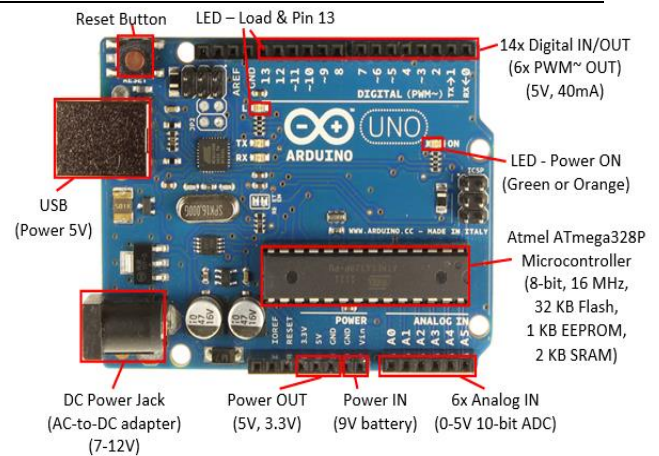


Figure. 2 Arduino uno board.

B. SOIL MOISTURE SENSOR (YL-69)

Moisture sensor is an electronic device used to monitor the moisture in the soil to prevent it to become too dry or too wet. Soil moisture sensor (YL-69) uses resistance to determine the isolation permittivity of the medium. Isolation permittivity is water content function[7]. The sensor initiates current throughout the whole two probes to determine the moisture in the soil. Soil moisture is shown in figure below[8]:

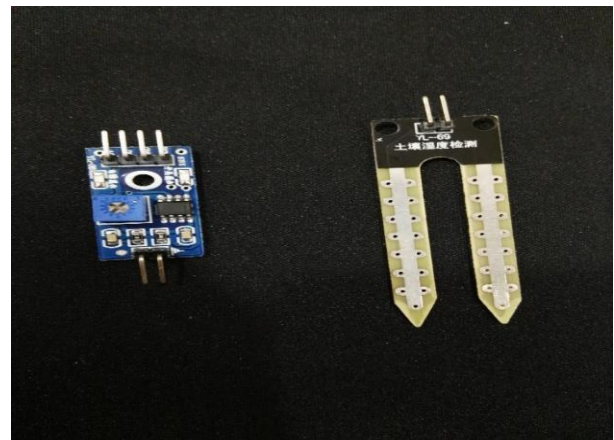


Figure.3. Moisture sensor YL-69.

YL-69 sensor has the flowing Readings for Loam soil:

TABLE 1. Sensor readings referring to loam soil condition.

Condition	Minimum reading	Maximum reading
Sensor in wet soil	350 ~	600

Sensor in semi humid soil	600 ~	950
Sensor in dry soil	950 and Above	/

C. GSM SIM 900A

GSM is a device use to make a connection with the cellular phone/computer. GSM module construct from a modem and power supply and communication circuit interfaces such as RS 232 and USB. A SIM card is inserts in SIM place like mobile phone to make a connection. It can perform sending and receiving short messages service, also can explore the content of SIM card and establishing or rejecting the voice call all that can operate at low power consumption[9].

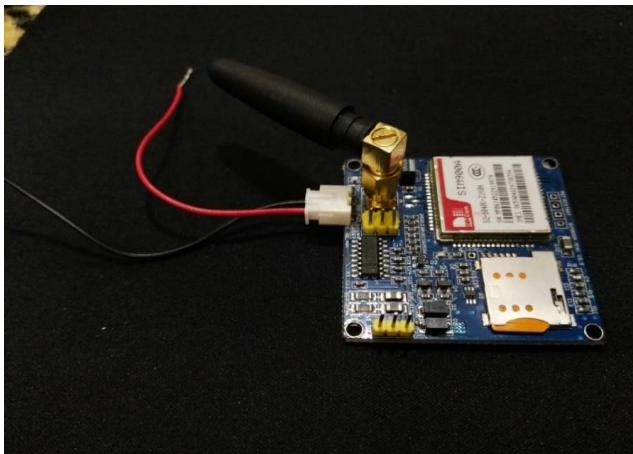


Figure.4 GSM module.

D. DC WATER PUMP

The water pump has two channels, one channel is connected to the water source and another is used to take the water to the area to be irrigated. The water pump is controlled by motor driver[10].

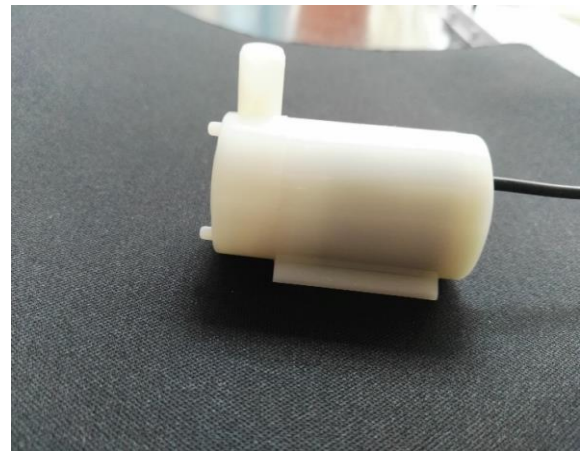


Figure. 2 Dc Water pump

4. WATERING IRRIGATION SYSTEM

The first operation starts from the moisture sensor as it refers to the amount of water in the soil. The moisture sensor principle will be based on readings previously programmed by the used and specified for each case whether the soil is wet or dry or normal, the readings can be tabled as following[11]:

TABLE 2. Sensor readings.

Sensor reading	Soil Condition	Action
350-600	Wet	No water flow
600-950	Semi wet	No water flow
950 Above	Dry	Water flow

Referring to these values, when the sensor readings varies between 350 to 600 this means that the soil is wet and no need for irrigation, when the sensor reading vary between 600 to 950 this means that the soil is in normal condition and there is also no water flow, when the sensor readings exceeded 950 this means that the soil is dry and the water pump is switched ON, These indications will be transmitted as a signal to Arduino Uno microcontroller that will establish a serial connection with GSM to send an SMS to the user[12].

RESULTS

The system hardware is as shown below:

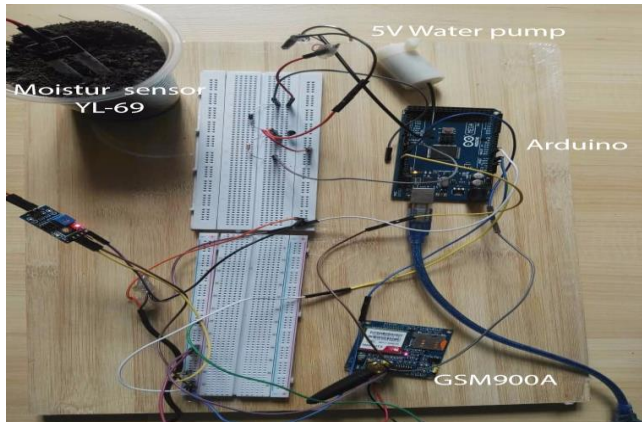


Figure 3. complete hardware circuit of the system.

5. SYSTEM PERFORMANCE

At the start of the operation, Arduino IDE used to monitor the behavior of the sensor serially and the sensor value set to be an analog value change continuously. When the sensor is inside dry soil, the readings reach above 1000, Arduino triggers to that value and the serial monitor indicates “soil is dry ... motor is ON ... soil is 0% wet”, a message is sent to the user “soil is dry ... motor is ON” through the GSM.

```

COM3
-----
Reading From the Sensor ...
moisture: 1023

soil is dry ..motor is ON...soil is 0% wet
message sent.
moisture: 1023
moisture: 1023
moisture: 1023
moisture: 1023
moisture: 1023

```

Figure 4. Serial readings of the sensor indicating the dryness.

Meanwhile, a message will be delivered to user’s cellular phone as in the following figure:

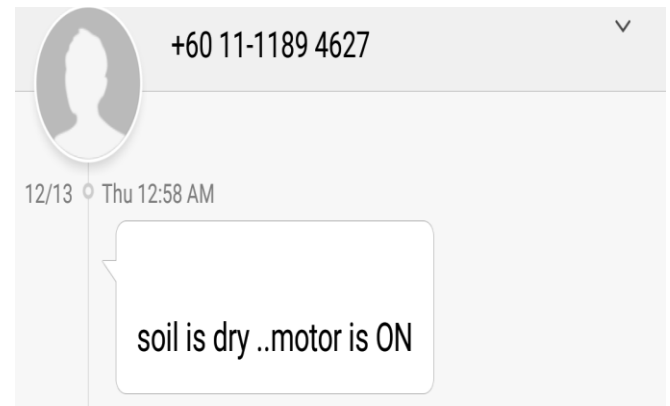


Figure 5. Monitoring through user’s mobile via SMS.

While the water pump irrigating the soil, the sensor keeps checking the soil moisture level and when it reaches threshold value of approximately 400, “soil is wet... motor is OFF” and irrigation operation stop automatically as shown below:

```

COM3 (Arduino/
-----
Reading From the Sensor ...
moisture: 1023

soil is dry ..motor is ON...soil is 0% wet
message sent.
moisture: 1023
moisture: 1023
moisture: 1023
moisture: 1023
moisture: 500

soil is wet ..motor is OFF ..soil is 83.33% wetmoisture: 390
moisture: 464
moisture: 485
moisture: 478

```

Figure 6. Serial readings of the sensor indicating the wetness.

Also, a message will be delivered to the user cellular phone indicating the soil has been irrigated and the motor switched OFF as i below:

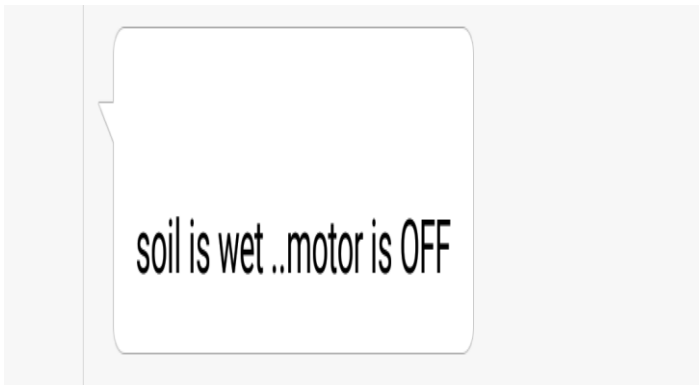


Figure 7. Monitoring through user’s mobile via SMS.

A. SENSOR READINGS

The voltage measured for moisture sensor at wet condition and dry condition and normal condition is as tabulated below:

TABLE 3. Sensor output in volt at each moisture degree

Soil condition	Sensor output
Dry	4.1 V
Normal	3.3 V
Wet	2.37 V

From the data obtained in the table above, it can be represented graphically below:

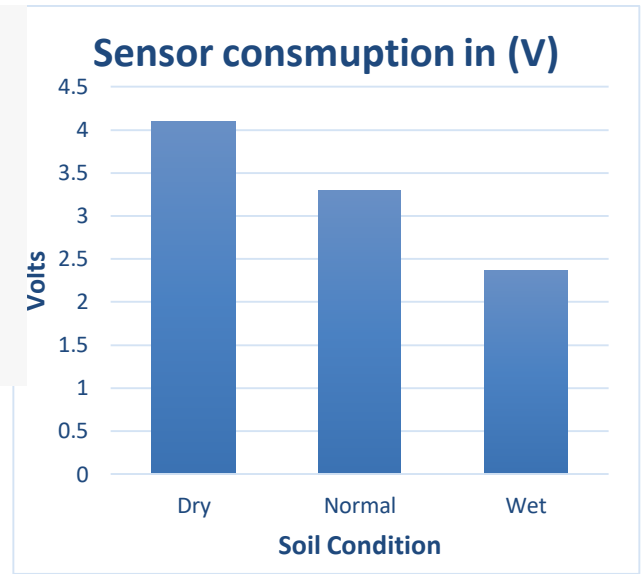


Figure 8. Sensor output in volt at each moisture degree graphically.

The X-Axis represent the volts consumed by the sensor and Y-Axis represent the soil condition. The obtained data shows the highest peak in dry condition because the current across sensor probes is very low due to high resistance

B. AFFECTION OF SOIL CONTENT ON SENSOR READINGS

The sensor probes affect by how much soil covers the probes and what is the type of the soil. Loam soil has been used in this prototype which is a mixture of sand and small amount of clay. The test for loam has been done and sensor readings has been recorded gradually by adding small drops of water (readings may vary depending on soil type and sensor calibration). The tested results shown in the table below

TABLE 4. Soil water content vs. sensor readings

Soil water content (cm3)	Sensor output
0	1023
25	905
50	839



Muhamed F. Obead1 , Ihsan A.Taha2 and Ahmed H. Salman3

75	644
100	324

C. SENSOR ACTIVITY AGAINST TIME

Sensitivity of YL-69 is analog unit per 1 sec, if 10 second taken as sample, the following graph will show how the sensor react to witness when uncertain amount of water added to a small amount of dry soil gradually:

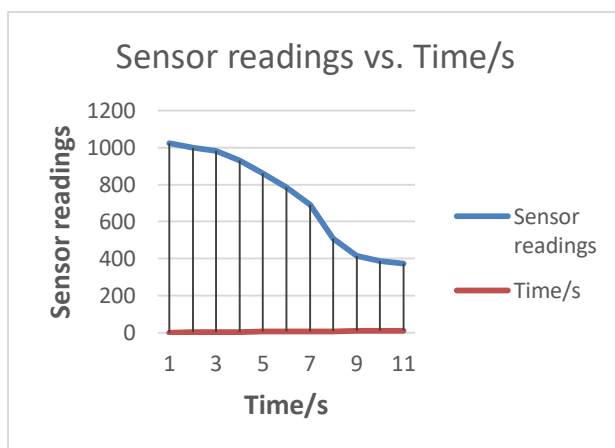


Figure 9. sensor behavior against time

As it can be seen from graph above, the sensor is at dry soil on its peak analog value (1023) and start decaying when water added to the probes place until it reaches maximum wetness (400-350).

CONCLUSION

“GSM Activated Watering System Prototype “has been achieve maximum protection for crops by irrigating exact amount of water for helping the user to get optimum agricultural. And that is also will help to use the water in proper way, besides, automatic irrigation economizes the user time and energy by monitoring his land remotely. Because the soil moisture varies from crop to another, so the moisture sensor is responsible of sense that moisture level in the soil. The system tested successfully, and it has been developed by hardware components. Soil moisture function is to indicate the

moisture degree in the soil. If the moisture degree below the desired level, the moisture sensor sends a signal to Arduino Uno microcontroller to trigger the water pump ON to start soil irrigating operation and the GSM module send an SMS to the user notifying about soil condition and the water pump state, when the desired moisture reached, the system stops automatically, and water pump is turned OFF. Thus, all the system function working properly.

Acknowledgment

I am grateful to all of those with whom I have the pleasure to work during this and other related papers. As well as for everyone who taught me a letter during my studies until I reached this stage of knowledge

REFERENCE

- [1] ISHAK, N. S., et al. GSM activated watering system prototype. IEEE International RF and Microwave Conference (RFM). IEEE, 2015. p. 252-256.
- [2] Anil, A., Thampi, A.R., Prathap John, M. & Shanthi, K.J. 2012. Project HARITHA - an automated irrigation system for home gardens. 2012 Annual IEEE India Conference (INDICON) 635–639.
- [3] Ahmed. "Getting Started with Arduino Difference-between-analog-pin-and-PWM-pin-in Arduino"/answer/Shahrukh-Ahmed-39%0A 2016.
- [4] Archana, P. & Priya, R. "Design and Implementation of Automatic Plant Watering System". *International Journal of Advanced Engineering and Global Technology* 2016. 4(01): 1567–1570. www.ijaegt.com.
- [5] Banzi, M. & Shiloh, M. "Getting Started with Arduino": The Open Source Electronics Prototyping Platform. 3rd Ed. Maker Media, Inc 2014.

[6] Margolis, M. "Arduino Cookbook". Online. O'Reilly Media, Inc 2011.

[7] Garo A.Pilawjian & Patrick T. Balech "Automated Irrigation System". International Journal of Science, Applied Mathematics & Information Science 2018.


[8] Gainwar, S.D. & Rojatkhar, D. V. "Soil Parameters Monitoring with Automatic Irrigation System". International Journal of Science, Engineering and Technology Research (IJSETR) 2015, 4(11): 3817–3820.

[9] Erfinden. "Interfacing SIM900A GSM Modem With Arduino". Instructables 2017. <http://www.instructables.com/id/Interfacing-SIM900A-GSM-Modem-with-Arduino/>.

[10] KUMAR, Rajan; SINGH, Bhim. "Single stage solar PV fed brushless DC motor driven water pump". IEEE Journal of Emerging and Selected Topics in Power Electronics, 2017, 5.3: 1377-1385.

[11] Parameswaran, G. & Sivaprasath, K. "Arduino Based Smart Drip Irrigation System Using Internet of Things". International Journal of Engineering Science and Computing 2016, 6(5): 5518–5521.

[12] PRASOJO, Ipin, et al. "Design of automatic watering system based on Arduino". Journal of Robotics and Control (JRC), 2020, 1.2: 59-63.



Author 2 Ihsan A. Taha

M.A. In information technology
Assistant Lecturer in the Department of
Computer Technologies / Al-Israa
University College



Author 3 Ahmed H. Salman

Assistant Lecturer in the Department of
Computer Technologies / Al-Israa
University College



Author 1 Muhammad F. Obead

Communication and Computer
engineering.

Assistant Lecturer / Department
of Computer Technologies / Al-
Israa University College